

Chapter 5

The Physics of Loading an Optical Dipole Trap

5.1 Introduction

In the last decade, many different schemes for preparing and trapping ultra cold and dense samples of atoms have been demonstrated. Of these, the optical dipole trap [38] requires no magnetic fields and relatively few optical excitations to provide a conservative and tightly confining trapping potential. These characteristics make it an appealing option for various metrology applications such as parity nonconservation and β -decay asymmetry measurements. It may also be an option for reaching BEC in a purely optical trap. For these applications, large samples of atoms must be transferred into the dipole trap. This is almost always done from a magneto-optical trap (MOT) [14]. However, the processes determining the transfer between the MOT and the optical dipole trap are poorly understood. Here we give a detailed description and explanation of the loading process and suggest ways in which to improve the loading.

The simplest optical dipole trap consists of a focused single Gaussian laser beam. Typically the light is detuned below the atomic resonance, from a few tenths of a nm to several tens of nm. The latter are called far off resonance traps (FORT) [39]. We will use the abbreviation FORT in discussing optical dipole traps. Conceptually a FORT works as follows: the AC Stark shift induced by the trapping light lowers the ground state energy of the atoms proportionally to the local intensity. The spatial dependence of the light intensity is therefore equivalent to a spatial dependence of the atomic potential energy. The atom has the lowest energy in the focus of the trapping beam and can therefore be trapped there. For very large detuning, typically several nm, the photon scattering rate becomes so low that the potential is truly conservative.

The first FORTs were running-wave Gaussian laser beams focused to a waist of about $10\ \mu\text{m}$ [38, 39]. By alternating the FORT with an optical molasses that cooled atoms into the trap [38, 39], about 500 to 1300 atoms were loaded. In later work [69, 76, 77], the FORT was loaded by overlapping it with a MOT continuously, which improved the number of atoms that was transferred to 10^6 .

A key step in the loading of a FORT from a MOT is a strong reduction of the hyperfine repump in the last 10-30 ms of the overlap between the traps. It has been conjectured [76] that this reduction helps because it reduces three density limiting processes, namely, radiative repulsion forces, photo-associative collisions, and ground state hyperfine changing collisions. However, to our knowledge, there has not yet been an ex-

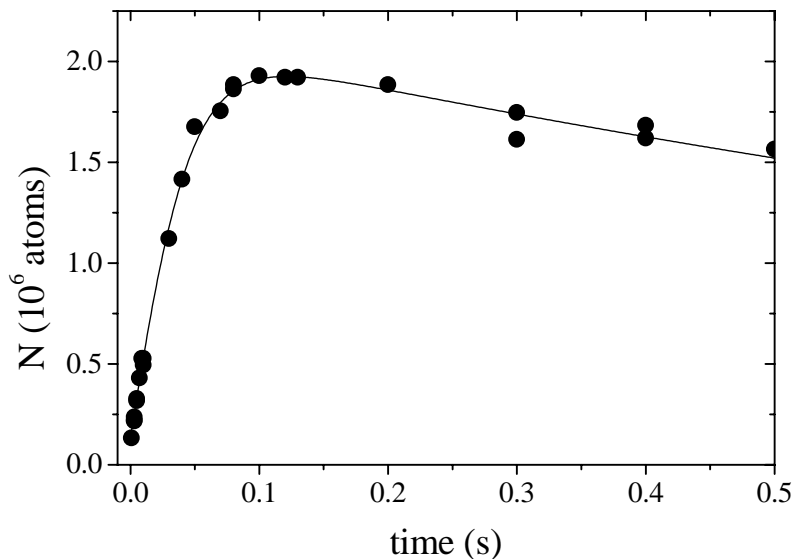


Figure 5.1: Number of atoms N in the FORT as a function of time spent loading, for a trap depth of -1 mK and a waist of $26 \mu\text{m}$.

tensive study of the loading process. Therefore, in this paper we present a detailed and comprehensive investigation of the many mechanisms that govern the loading process.

We find that loading a FORT from a MOT is an interesting dynamical process rich in physics. As illustrated in Fig. 5.1, the number of atoms in the FORT first increases rapidly and nearly linearly in time until loss mechanisms set a limit to the maximum number. The loading rate and loss processes both depend in complex ways on the laser fields involved. One factor that determines the loading rate is the flux of atoms into the trapping volume. This flux depends on the MOT density and temperature, i.e., average velocity of the atoms in the MOT. For the atoms to be trapped in the FORT, cooling mechanisms must also be active in the region where the MOT and FORT overlap. Both the flux and the probability for trapping depend on the trap depth and light-shifts inherent to the FORT.

Losses from the trap can be caused by heating mechanisms and collisional processes. Contributions to heating arise from spontaneously scattered FORT light photons, background gas collisions [16, 17], intensity fluctuations, and the pointing stability of the FORT beam [71]. However, for large numbers of atoms the losses are dominated by collisional processes [78], including photo-association, spin exchange/ground state hyperfine changing collisions, and radiative escape. Photo-associative collisions can be induced by the FORT light itself and lead to untrapped molecules. During a ground state hyperfine changing collision, a pair of atoms gains as much as the hyperfine energy splitting in kinetic energy (0.14 K for ^{85}Rb), which is enough to eject it out of the FORT. In radiative escape, an atom is optically excited and reemits during

a collision, and the attractive dipole-induced interaction between the excited and non-excited atom leads to an increase of kinetic energy which is enough to eject an atom from the trap.

The loading and loss rates depend on the shape and depth of the optical potential, as well as the intensity and detuning of the MOT light fields. By studying the loading rate and loss rate separately as a function of these parameters, we have obtained a detailed understanding of the FORT loading process. This understanding has allowed us to optimize parameters in order to improve our loading efficiency to high values (47% of the MOT atoms were loaded into the FORT). Although we studied the loading of ^{85}Rb into a dipole trap with a detuning of a few nm, the physical processes and optimization should be generally applicable to other alkali species and FORTs, when the FORT trap depth exceeds the MOT atom temperature. In the opposite regime, O'Hara et al. [79] have shown that a static equilibration model applies in CO_2 laser traps.

This Chapter is organized as follows. In Sec. 5.2 a more detailed expression for the depth and shape of the FORT potential is given. In Sec. 5.3 our experimental setup is discussed, including the loading of the FORT and the diagnostic tools for measuring the number of atoms and size of the trapped sample. In Sec. 5.4 we present measurements of the loading rate and loss rate as a function of different MOT and FORT parameters. In Sec. 5.5 the temperature of the atoms in the FORT is given. In Sec. 5.6 the loss rates of the FORT in the absence of MOT light are discussed. In Sec. 5.7 we present a physical model of the loading process which explains the data presented in Sec. 5.4. In Sec. 5.8 we discuss how our model explains the interdependencies of the MOT and FORT parameters. In Sec. 5.9 we demonstrate how, based on our understanding of the FORT loading process, the number of trapped atoms can be improved using a shadowed repump beam. Finally, Sec. 5.10 contains summarizing remarks and discusses the general applicability of these results to other traps.

5.2 The FORT potential

The trapping potential formed by the focused laser beam has been described in detail in Section 4.2. The most general form for the spatial dependence of U is given by

$$U(r, z) = U_0 \frac{\exp[-2r^2/w(z)^2]}{1 + (z/z_R)^2}, \quad (5.1)$$

with z the longitudinal coordinate and r the radial coordinate (denoted ρ in previous chapter). Then the beam radius $w(z)$ is given as a function of longitudinal position, $w(z) = w_0 \sqrt{1 + (z/z_R)^2}$ where z_R is the beam Rayleigh range [72]. Equation (4.1) gives U_0 as a function of many parameters, including the laser beam polarization ellipticity ϵ .

This chapter focuses primarily on the loading of a FORT made with linearly polarized trapping light. This is because loading the linear FORT is the most efficient process, and therefore usually a first step toward loading the circular FORT. We justify this approach in Sec. 5.4.6, where we discuss how the loading of the FORT is affected

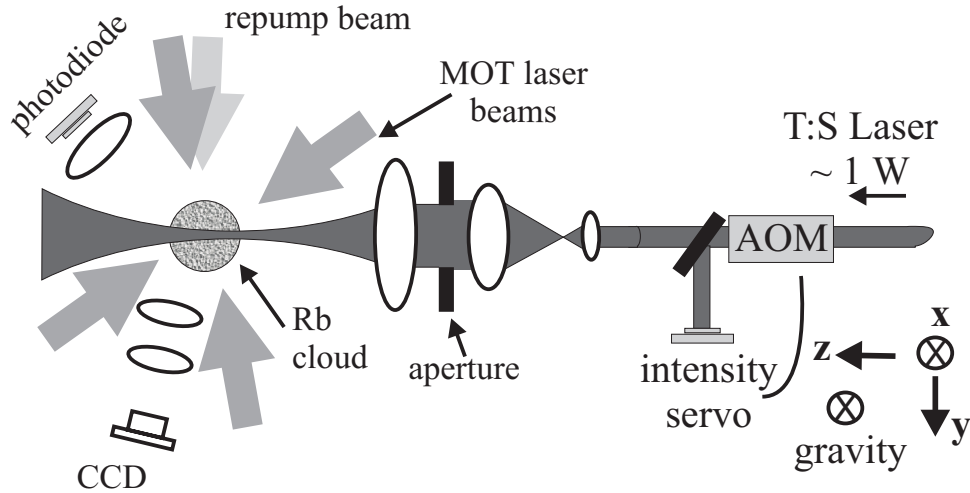


Figure 5.2: Experimental setup

when optical Zeeman splittings are present due to elliptical polarization of the FORT light.

5.3 Experiment

The experimental setup is very similar to that described in the previous chapter, and shown schematically in Fig. 5.2. The starting point of all the experiments described here is a MOT, which collects ^{85}Rb atoms from a 5×10^{-10} Torr vapor, and contains a maximum of about 3×10^8 atoms in steady state with a filling time constant of ≈ 12 s. Two extended-cavity diode lasers, both stabilized to atomic lines in ^{85}Rb at 780 nm with a dichroic atomic vapor laser lock (DAVLL) are used for the MOT (see [70] and Appendix A). One laser provides 6 mW for trapping and cooling (divided between three retro-reflected beams) and is tuned red of the $5^2S_{1/2} F = 3 \rightarrow 5^2P_{3/2} F' = 4$ transition by an amount denoted as Δ_M . We refer to this light as the “primary” MOT light (previously called the “cooling” laser), and denote its total six beam intensity by I_M . The beams have a Gaussian beam radius of 9.3 mm. The other MOT laser is used for hyperfine repumping and is tuned near the $5^2S_{1/2} F = 2 \rightarrow 5^2P_{3/2} F' = 3$ transition. We refer to this light as the “repump” light, and denote its detuning as Δ_R ($\Delta_R = 0$ unless otherwise indicated). We use one single retro-reflected beam of intensity $I_R = 3 \text{ mW/cm}^2$ for repumping the MOT. Both laser beams have acousto-optic modulators (AOM) in them for temporal control of the light intensity. The magnetic field gradient of the quadrupole field along the strong axis is 5 Gauss/cm, and can be switched off within 3 ms.

The FORT light is generated with a home-built Titanium:Sapphire laser, with a nominal output power of 1.2 W. After passing through an AOM, the first order is intensity stabilized, collimated, and expanded. The beam is focused into the vacuum chamber with a 20 cm focal length doublet lens to a focus of radius $w_0 = 26 \mu\text{m}$

($1/e^2$ intensity), unless stated otherwise. The detuning from the D_2 line is typically 2 to 4 nm to the red. For $P = 300$ mW, $w_0 = 26 \mu\text{m}$, and $\lambda = 784$ nm the well depth $U_0/k_B = -1.4$ mK. Approximating the center region of the FORT potential as harmonic, the trap oscillation frequencies are 4.6 kHz and 34 Hz in the transverse and longitudinal direction, respectively. Note that the trap as a whole is highly anharmonic at the edges. The peak photon scattering rate (Γ_{sc}) for these parameters is 1.3 kHz, as calculated from the well known expression

$$\Gamma_{\text{sc}} = \frac{1}{2\tau_0} \frac{1}{1 + \frac{I_S}{I} \left(1 + \frac{4\Delta^2}{\gamma^2}\right)} \quad (5.2)$$

where the natural lifetime $\tau_0 \approx 30$ ns, the saturation intensity $I_S \approx 1.6$ mW/cm², the laser detuning is given by Δ , and the full width half maximum of the natural linewidth $\gamma \approx 6$ MHz.

5.3.1 Loading and diagnostics

The sequence for loading the FORT from the MOT and measuring the number of atoms is as follows. The MOT fills for typically 3 s at an optimum detuning of $\Delta_M = -2\gamma$, and at maximum repump intensity. This results in typically 3×10^7 atoms in the MOT. We then switch on the FORT while simultaneously increasing the detuning of the primary MOT light and reducing the repump light intensity. We will refer to this stage in the timing cycle as the ‘‘FORT loading stage,’’ which is typically 20 – 200 ms long, depending on FORT parameters. The primary MOT light, MOT repump light and magnetic fields are switched off, and the atoms are held in the FORT for a variable length of time, but at least 100 ms before the detection light comes on, so that the MOT cloud can fall out of the detection region. The atoms are then released from the FORT and detected by turning on the MOT light (primary and repump) but no magnetic field, the primary MOT light frequency now closer to resonance $\Delta_M = -\gamma/2$. The number of atoms N is determined from the amount of fluorescence [74] collected with a low noise photo-diode. Under some circumstances the cloud of atoms trapped in the FORT is so large that it extends beyond the field of view of our photo detector. In this case the number is measured by recapturing them into a MOT. For this case the detection must be delayed for at least 250 ms to give the MOT cloud time to fall out of the MOT beams, thus making sure that we are detecting FORT atoms and not MOT atoms.

The number of atoms in the FORT is measured as a function of storage time, as in the previous chapter. We call this a lifetime curve. A typical example of a lifetime curve is shown in Fig. 5.3. Note that the number of atoms does not have a simple exponential dependence on time. We find that the loss of atoms is well described by Eq. (4.3) and its solution [Eq.(4.4)], as was the circular FORT. We use the analytical solution of Eq. (4.3) as a fit function to the data to find the number N_0 initially trapped, as well as values of Γ and β' (see Sec. 5.6). The prime on β' is used to refer to atom number loss instead of density loss.

Absorption imaging is used to measure the size and temperature of the MOT cloud as well as the cloud of atoms in the FORT. The imaging system consists of a two

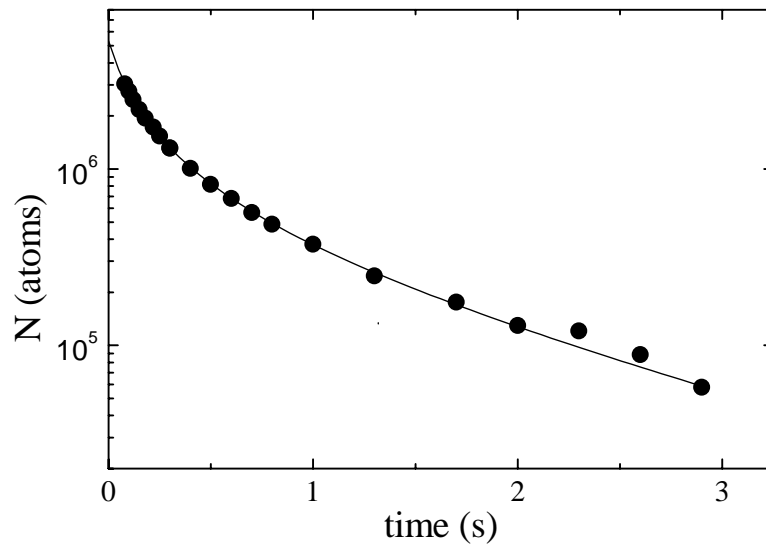


Figure 5.3: Number of atoms remaining in the FORT as a function of time, for trap parameters $w_0 = 26\mu\text{m}$, $P = 290\text{ mW}$, $\lambda = 782.5\text{ nm}$. The trap depth is $U_0/k_B = -2.3\text{ mK}$. The solid curve is a fit of Eq. (4.3) to the data.

lens telescope making a one to one image onto a CCD array. The lenses are 18 cm focal length cemented doublets. The line of view is perpendicular to the FORT beam. This allows us to observe the transverse as well as longitudinal shape of the cloud of atoms trapped in the FORT.

5.4 Dynamics of the loading process

In Fig. 5.1 we showed that the transfer of atoms from the MOT to the FORT is a dynamical process, in which the number of atoms loaded into the FORT increases rapidly until a competing process causes the number to reach a maximum and then decrease at later times. Here we investigate the precise shape of the loading curve in more detail. The number of atoms in the FORT for longer loading times is shown in Fig. 5.4.

The shape of the loading curve is explained as follows. Initially, the number of atoms in the FORT increases as $N(t) = R_0 t$. But at larger times the number starts to roll over. This occurs for two reasons. First, the MOT loses atoms due to the reduced repump intensity and different detuning of the primary MOT light. This reduces the loading rate. Second, the trap loss rates become large enough to counteract the loading.

In a similar fashion as Eq. (4.3) we find that the shape of the FORT loading curve

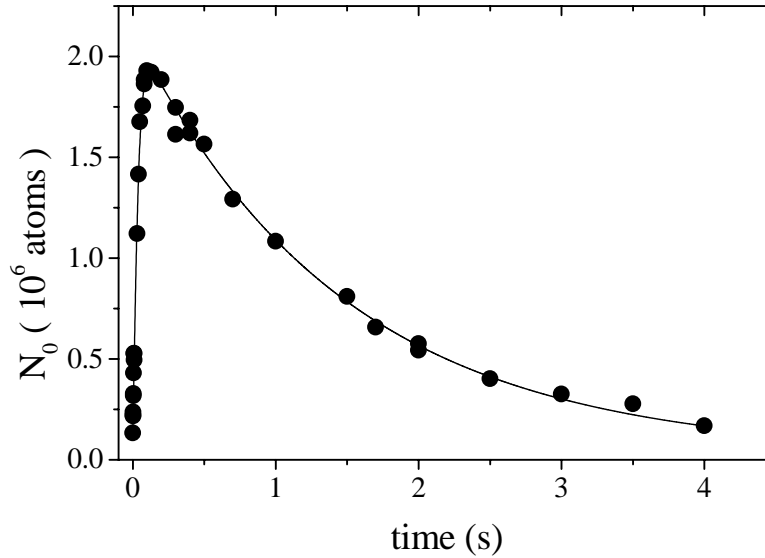


Figure 5.4: Number of atoms loaded in the FORT as a function of FORT loading stage duration, for trap parameters $w_0 = 26 \mu\text{m}$, $P = 305\text{mW}$, and $\lambda = 784.5 \text{ nm}$. Primary MOT intensity $I_M = 8.2 \text{ mW/cm}^2$ and MOT repump intensity $I_R = 4.7 \mu\text{W/cm}^2$. The solid curve is a fit of Eq. (5.3) to the data. The loss coefficient $\beta'_L = (1.56 \pm 0.22) \times 10^{-5} (\text{atoms s})^{-1}$, see text.

is well described by

$$\frac{dN}{dt} = R_0 \exp(-\gamma_{\text{MOT}}t) - \Gamma_L N - \beta'_L N^2, \quad (5.3)$$

where γ_{MOT} is the rate at which the MOT loses atoms due to the change of MOT light detuning and repump intensity. And Γ_L and β'_L characterize density-independent and density-dependent losses. The subscript L expresses the fact that the loss rates during loading are generally different from those during storage in the FORT without any MOT light present.

Four parameters determine the loading: R_0 , γ_{MOT} , Γ_L , and β'_L . To understand the physics of the loading process we must therefore determine these four parameters under a variety of conditions. The initial loading rate, R_0 , can be determined directly from the initial slope of the loading curve. Then γ_{MOT} can be determined by measuring the rate at which the MOT fluorescence decreases during the FORT loading stage. We confirmed this explicitly by allowing the MOT to dissipate for a variable length of time, τ_d , before the start of the FORT loading stage. The initial slope of the loading curve $R(\tau_d)$ was observed to be $R(\tau_d) = R_0 \exp(-\gamma_{\text{MOT}}\tau_d)$, consistent with the MOT fluorescence measurement. The rate constants β'_L and Γ_L can then be determined by fitting the numerical solution of Eq. (5.3) to the data. The solid curve in Fig. 5.4 is

such a fit, indicating how well the loading process is described by Eq. (5.3). With R_0 and γ_{MOT} constrained to the directly measured values, as mentioned above, the extracted values of β'_L and γ_L show that the $-\beta'_L N^2$ loss term clearly dominates over the $-\gamma_L N$ term. This is most apparent in the slope of the tail of the load curve. Thus collisional processes dominate the losses from the FORT during its loading.

The losses during the loading of the FORT can be studied independent of the loading rate. This is done as follows. The FORT is first loaded under optimum conditions and the atoms stored for 100 ms, after which the MOT lasers are switched back on, but there is no magnetic field, for the remainder of the FORT storage time. We refer to such a measurement as a loss curve measurement. In this way we can study the effect of the MOT light field parameters on the loss rate, i.e., we eliminated the loading term in Eq. (5.3). With the MOT lasers on, the loss rate is much larger than in the absence of any MOT light and completely dominated by density dependent losses β'_L . The result of such a measurement is shown in Fig. 5.5 (\blacktriangle), which also contains the lifetime curve (\bullet) recorded in the absence of MOT light. Comparing corresponding loading and loss curves we find the same values of β'_L from the different types of data sets to within a 30% spread. The advantage of measuring a loss curve is that we can independently change all the MOT light field parameters without altering the number of atoms initially loaded into the FORT.

The nice agreement between the value of β'_L determined from the loading curve in Fig. 5.4 and the loss curve in Fig. 5.5, taken for identical MOT and FORT parameters, gives good confidence that Eq. (5.3) gives a good description of the physics involved in loading the FORT.

The fact that collisional losses, β'_L , dominate the tail of the loading curve can also be seen in another way. If one neglects the $-\Gamma_L N$ term in Eq. (5.3) and sets the loading rate to be constant at R_0 , i.e. assuming that the MOT does not lose atoms during the loading of the FORT, the steady state solution of Eq. (5.3) is

$$N_{\text{st}} = \sqrt{R_0/\beta'_L}. \quad (5.4)$$

Substituting the values of R_0 and β'_L obtained as discussed above, the calculated N_{st} agrees to within 10% with the maxima of the loading curve.

Several consistency checks were performed on the accuracy of fitting Eq. (5.3) to the data. One test was to set all four parameters in Eq. (5.3) free. This reproduced the independently determined values of R_0 and γ_{MOT} , as well as those of Γ_L and β'_L , with Γ_L least well determined. Both γ_{MOT} and Γ_L give rise to exponential decay and are therefore strongly coupled in the least squares fit. We find that most often Γ_L comes out of the fit as zero, and γ_{MOT} to within 20% of the value determined directly from the MOT fluorescence. Assuming that the value of Γ_L should at least be as big as that of the trap in the absence of the MOT light, we set it to that value and see no significant change in the value of β'_L . Fitting the loading curves with these constraints and different combinations of free parameters, we find a spread in the β'_L values of up to 30% for a given data set, which is more than adequate for the analysis of the data given below. We are now in the position to investigate the loading of the FORT in terms of R_0 and β'_L separately, by either measuring load curves or loss curves.

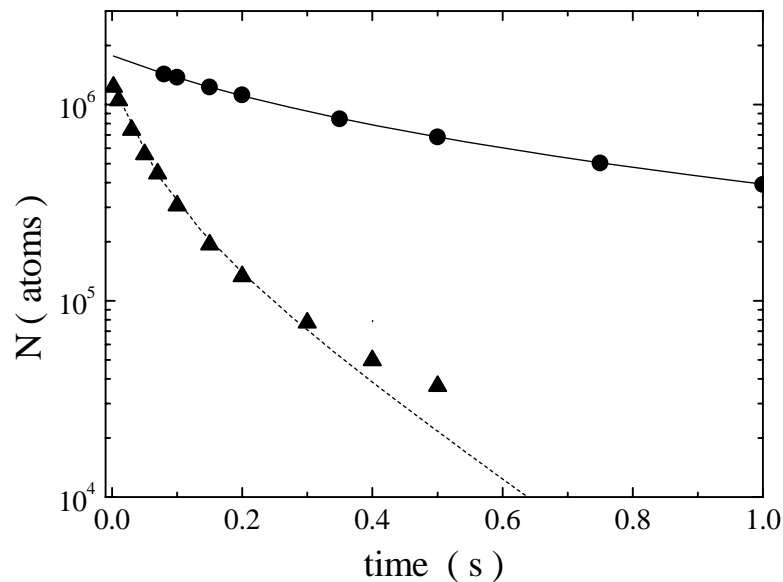


Figure 5.5: Number of atoms in the FORT vs time, without any MOT light (\bullet) and with MOT light on (\blacktriangle), primary MOT intensity $I_M = 8.2 \text{ mW/cm}^2$, and MOT repump intensity $I_R = 4.7 \mu\text{W/cm}^2$. For trap parameters $w_0 = 26 \mu\text{m}$, $P = 305 \text{ mW}$ and $\lambda = 784.5 \text{ nm}$. The curves are fits of Eq. (4.3) to the data. The number dependent loss rates are $\beta' = (1.42 \pm 0.05 \times 10^{-6} \text{ (atoms s)}^{-1})$ and $\beta'_L = (1.4 \pm 0.1) \times 10^{-5} \text{ (atoms s)}^{-1}$, for the atoms stored in the FORT without any MOT and with MOT light, respectively.

5.4.1 Hyperfine repump intensity and detuning

A commonly used technique to improve the loading of a FORT is to reduce the hyperfine repump intensity. Here we show how the intensity and detuning of the repump light affect the loading rate R_0 as well as the loss rate β'_L . We concentrate first on the dependence of the loading rate and loss rate on the hyperfine repump intensity at resonance ($F = 2 \rightarrow F' = 3$). The data in Fig. 5.6 show that for the maximum I_M there is a critical repump intensity below which the MOT is not sustained during the FORT loading stage and the loading rate goes to zero. For I_R above that critical value, the loading rate decreases because the density in the MOT decreases due to radiative repulsion. The optimum level is about $I_R = 5 \mu\text{W/cm}^2$. Note that the loading rate of the FORT is as high as $5 \times 10^7 \text{ atoms s}^{-1}$, which is a factor 2 higher than that of the MOT. The loss rate β'_L increases rapidly with repump intensity and starts to saturate at high repump intensity. For lower I_M , saturation sets in at lower repump intensities and β'_L is smaller.

The optimum repump intensity is intimately linked to the repump detuning. This interdependence is shown in Fig. 5.7, where the maximum number of atoms loaded into the FORT is plotted versus Δ_R for different values of I_R . Increasing I_R from

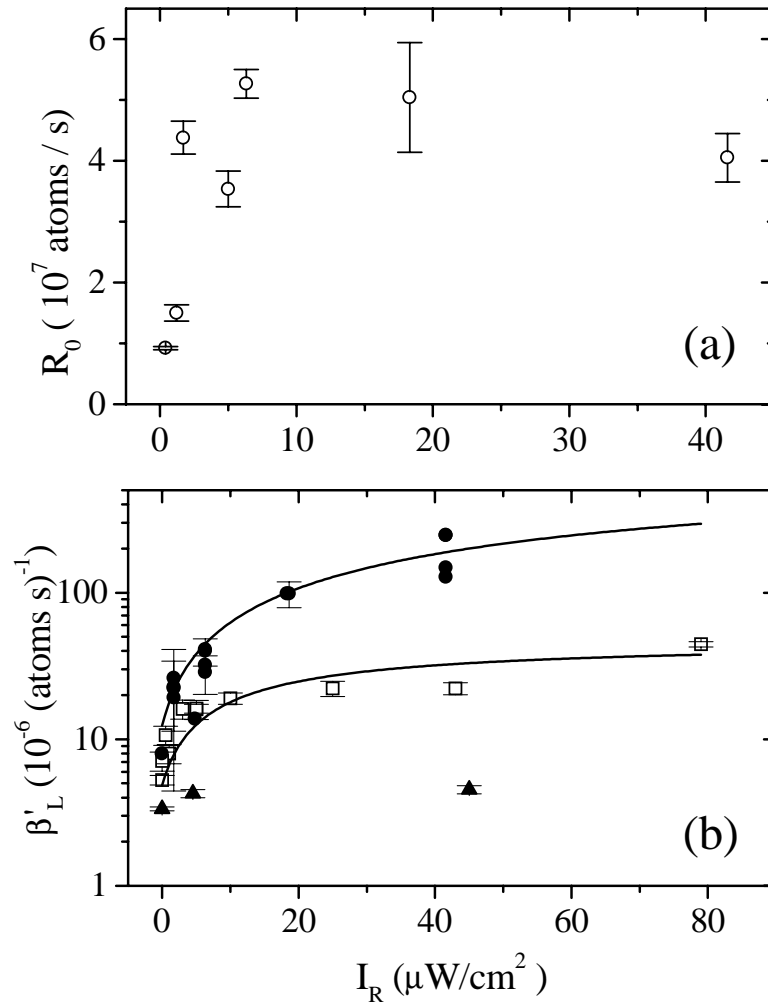


Figure 5.6: FORT loading rate R_0 (a) and loss coefficient β'_L (b) as a function of hyperfine repump light intensity. For trap parameters $w_0 = 26 \mu\text{m}$, $P = 300\text{mW}$ and $\lambda = 784.5\text{nm}$. The loss rate was measured for $I_M = 8 \text{ mW}/\text{cm}^2$ (\bullet), reduced MOT intensity of $I_M = 1 \text{ mW}/\text{cm}^2$ (\square), and complete absence of primary MOT light (\blacktriangle). The solid lines are derived from the model described in Sec. 5.7.1. Error bars are statistical and do not reflect systematic uncertainties in I_M .

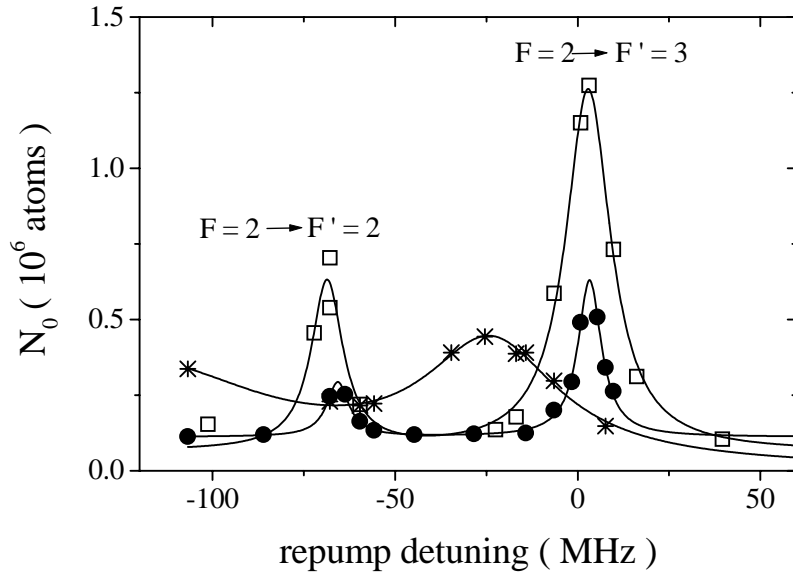


Figure 5.7: Number of atoms in FORT as a function of MOT hyperfine repump detuning for different repump intensities, $1.4 \mu\text{W}/\text{cm}^2$ (\bullet), $4 \mu\text{W}/\text{cm}^2$ (\square), and $280 \mu\text{W}/\text{cm}^2$ ($*$). The frequency offset is arbitrary. FORT parameters are $w_0 = 26 \mu\text{m}$, $P = 200 \text{ mW}$, and $\lambda = 798.1 \text{ nm}$. Solid curves are Lorentzians fitted to the data to guide the eye.

From $1.4 \mu\text{W}/\text{cm}^2$ to $4 \mu\text{W}/\text{cm}^2$, we see that the number in the trap increases, but the optimum repump detuning stays on resonance. Increasing the intensity to $280 \mu\text{W}/\text{cm}^2$ causes the optimum repump detuning to shift red. Interestingly, the optimum number of atoms is loaded when the repump scattering rate is the same for both $I_R = 4 \mu\text{W}/\text{cm}^2$ and $I_R = 280 \mu\text{W}/\text{cm}^2$ due to the different detuning, indicating that an optimum repump scattering rate exists for loading the FORT. However, the number of atoms drops and the resonance broadens, which shows that the number of atoms in the FORT is not determined by the repump scattering rate alone. This will be explained in more detail in Sec. 5.8.

In summary, the loading rate R_0 is optimal for a very low repump intensity of about $5 \mu\text{W}/\text{cm}^2$ and zero detuning. The loss rate β_L' increases with repump intensity and is larger for higher intensity of the primary MOT light.

5.4.2 Primary MOT light intensity

Both R_0 and β_L' depend on the primary MOT intensity, I_M . The data in Fig. 5.8 show that β_L' rises rapidly and then saturates with increasing I_M . The MOT intensity at which saturation sets in is higher for higher repump intensities. Combined with the dependence of β_L' on repump intensity this suggests that excited state collisions leading

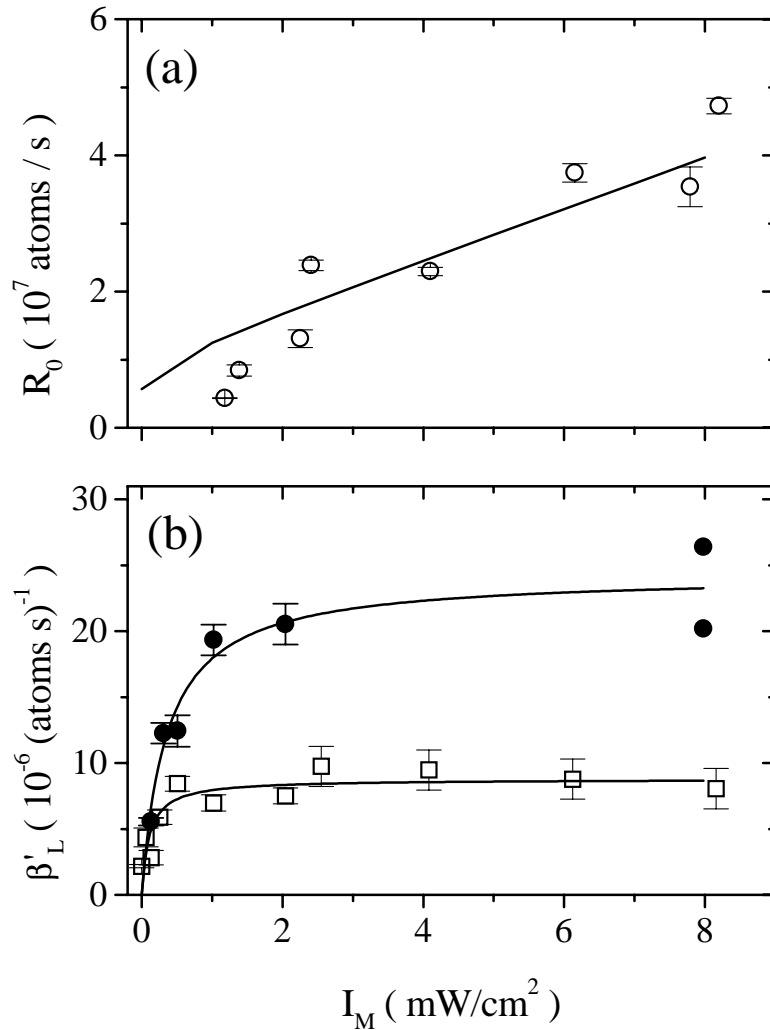


Figure 5.8: FORT loading rate R_0 (a) and loss coefficient β'_L (b) as a function of primary MOT light intensity, for a fixed repump intensity I_R . Both (\circ) and (\bullet) represent $I_R = 5 \mu\text{W}/\text{cm}^2$, while in (\square) $I_R = 0$. The solid lines are derived from the models in Secs.5.7.2 and 5.7.1 for (a) and (b), respectively. FORT parameters are those of Fig. 5.6.

to radiative escape are responsible for the losses during loading, as is confirmed by the model that we develop in Sec. 5.7. The solid curves in Fig. 5.6 are based on this model and agree very well with our data.

As shown in Fig. 5.8, the loading rate R_0 increases nearly linearly with I_M . As will be argued in Sec. 5.7, this implies that the loading rate strongly depends on the cooling mechanisms in the MOT.

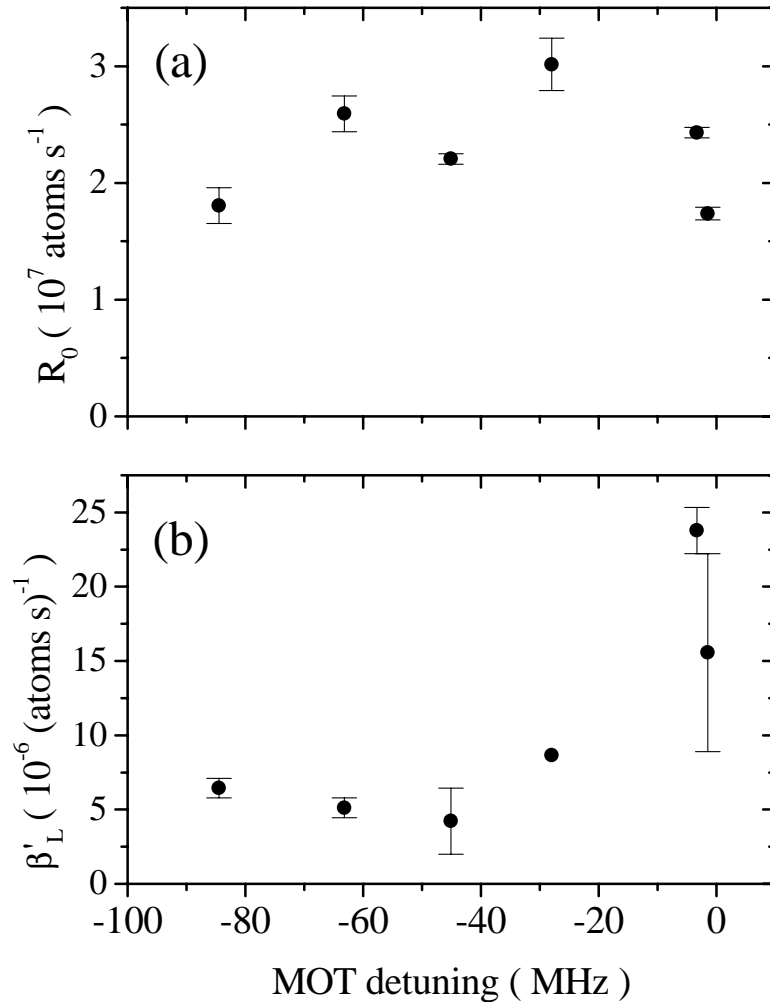


Figure 5.9: FORT loading rate R_0 (a) and loss coefficient β'_L (b) as a function of the primary MOT light detuning, Δ_M , during loading. The repump intensity is $5\mu\text{W}/\text{cm}^2$. For trap parameters $w_0 = 26\mu\text{m}$, $P = 300\text{mW}$, and $\lambda = 784.5\text{nm}$.

5.4.3 The role of MOT detuning

Both R_0 and β'_L also depend on MOT detuning, as shown in Fig. 5.9. For these data, I_R is reduced to the value that gives optimum loading into the FORT. A maximum in R_0 is observed at about $\Delta_M \approx -30$ MHz. At slightly larger detunings the loss rate β'_L has a minimum. The maximum number of atoms is loaded into the FORT at a detuning that is simultaneously close to the maximum in the loading rate and close to the minimum in the loss rate.

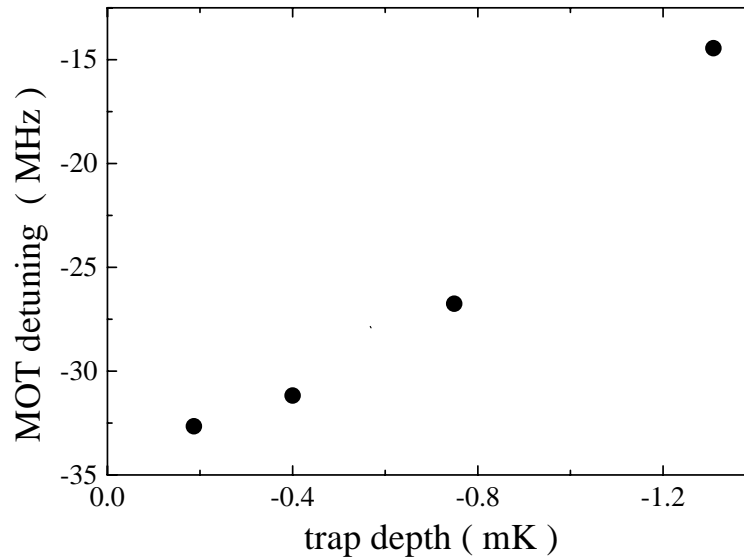


Figure 5.10: MOT detuning for maximum number of atoms loaded into the FORT versus trap depth, $w_0 = 26 \mu\text{m}$.

We also observe that the optimum detuning of the primary MOT light during the loading stage depends on the depth of the FORT. This is illustrated in Fig. 5.10. For deeper traps the optimum detuning is smaller. The FORT depth was varied by changing the wavelength and power of the FORT light.

5.4.4 Alignment with respect to the MOT

Another factor affecting the FORT loading is the relative alignment of the FORT with respect to the MOT. We find that the loading rate is optimum with a longitudinal displacement between the center of the FORT and the MOT. The optimum displacement depends on the FORT depth. Absorption imaging is used to determine the separation between the FORT and the MOT. We observe that as trap depth increases, the displacement must increase in order to maximize the number of atoms loaded. Typically the displacement between the focus of the FORT and the MOT is about half a MOT diameter.

In shallow traps the displaced loading of the atoms causes an initial sloshing of the atoms in the longitudinal direction. The sample of atoms can be seen to make one and a half oscillations before it thermalizes at the center of the FORT; this takes about 100 ms.

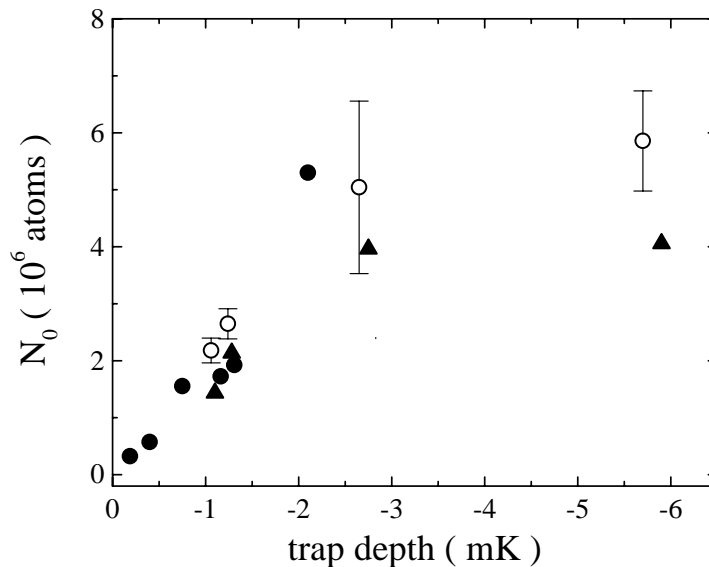


Figure 5.11: Number of atoms loaded into the FORT as a function of trap depth for $w_0 = 26 \mu\text{m}$ (\bullet) and $w_0 = 22 \mu\text{m}$ (\blacktriangle). For the latter data set the steady state number [see Eq. (5.4)] is calculated from R_0 and β'_L taken from Fig. 5.12, is plotted as \circ .

5.4.5 Dependence on FORT depth

We measured how the loading rate, loss rate, and total number of atoms trapped in the FORT depends on the trap depth. This is shown in Figs. 5.11 and 5.12. For each data point, the MOT detuning, repump intensity, and alignment of the FORT with respect to the MOT are optimized to give the highest number of atoms in the FORT. The waist of the trapping beam is fixed and the trap depth is varied by changing both the detuning and power of the FORT beam. The dependence of N_0 on trap depth can be explained as an increase in R_0 and a reduction of β'_L as the trap gets deeper. This is illustrated by the data shown in Fig. 5.12.

For comparison to the data in Fig. 5.11, we calculated N_{st} using Eq. (5.4) by inserting the measured R_0 and β'_L . The calculated values N_{st} (\circ in Fig. 5.11) agree well with the measured number, and depends linearly on trap depth up to 3 mK. At 6 mK, N_0 lies below the extrapolated straight line because β'_L cannot decrease below its value in the absence of MOT light.

For a waist of $26 \mu\text{m}$ we have observed transfer efficiencies from the MOT to the FORT of 20%. For traps with a larger waist, $w_0 = 40 \mu\text{m}$, transfer efficiencies of 40% and higher have been observed. If we compare FORTs with about the same depth of $U_0 \approx 1 \text{ mK}$ but different waists, we observe that more atoms are loaded when the waist is bigger. This is mainly due to an increase of the loading rate (see Sec. 5.7.2). Changing the waist from $26 \mu\text{m}$ to $75 \mu\text{m}$, we observed a strong reduction of

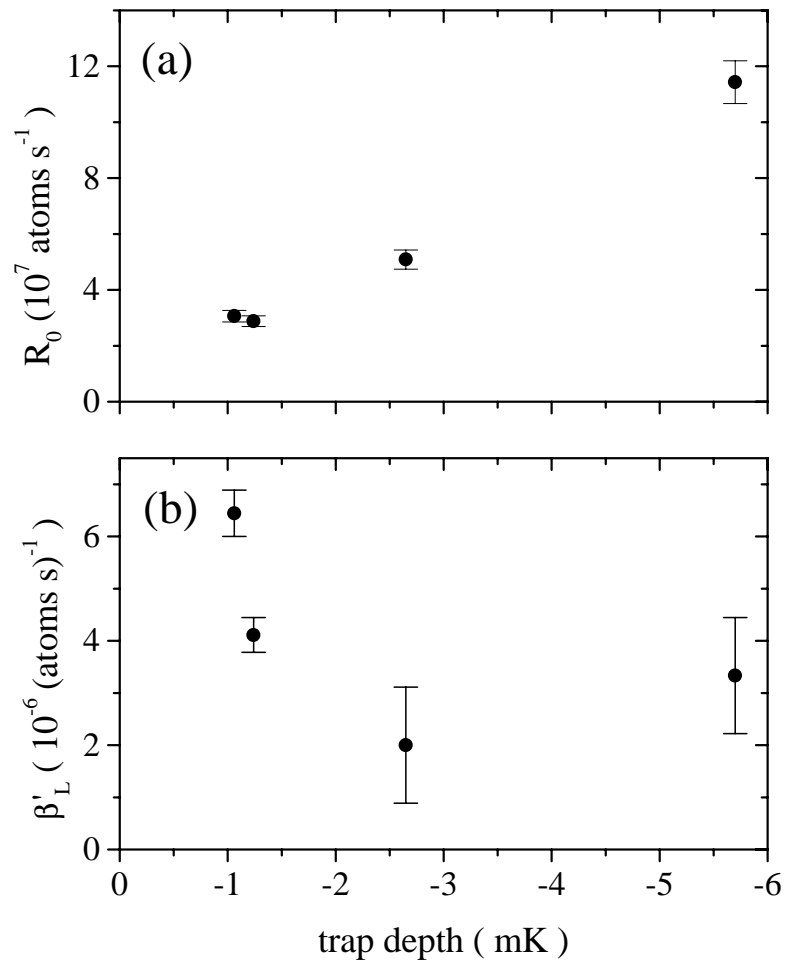


Figure 5.12: FORT Loading rate R_0 (a) and loss rate β'_L (b) as a function of trap depth U_0 for $w_0 = 26 \mu\text{m}$.

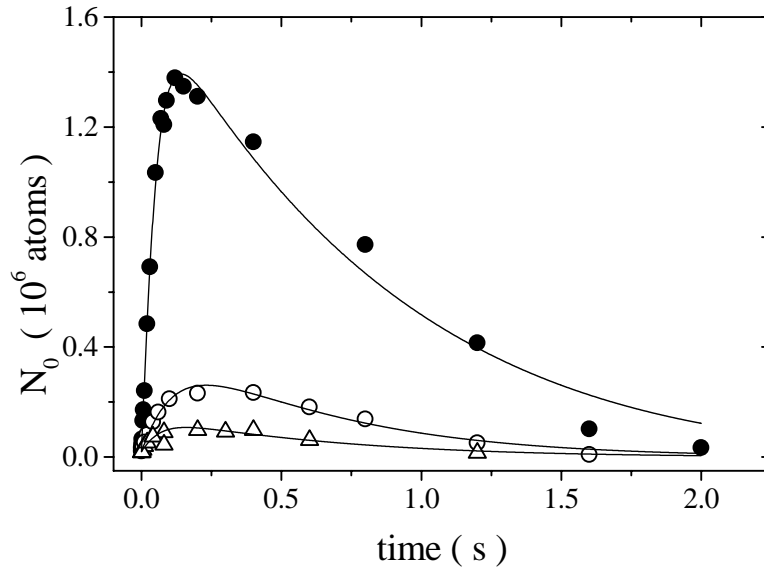


Figure 5.13: Number of atoms in the FORT as a function of loading time for three different ellipticities of the FORT light. In descending order of the curves, $\epsilon = 0.999$, 0.915 , and 0.852 . The FORT parameters are $w_0 = 22\mu\text{m}$, $P = 600\text{ mW}$, and $\lambda = 784.5\text{ nm}$.

the lifetime of the trapped sample. We attribute this reduction to the fact that in this regime, the scattering force becomes stronger than the trapping force and expels atoms from the trap[38].

5.4.6 The effect of elliptically polarized FORT light

As the data in Fig. 5.13 show, the polarization of the FORT light has a profound effect on the number of atoms loaded into the FORT. A change of the ellipticity (See Section 4.2) from linear polarization, $\epsilon = 0.999$, to slightly elliptical polarization, $\epsilon = 0.915$, causes the number of atoms to drop by a factor of 7. At $\epsilon = 0.852$ the number dropped by more than an order of magnitude. The drop in number is caused by a combination of effects. Analysis of the shape of the load curves in Fig. 5.13 shows that the loading rate is reduced by an order of magnitude and the exponential loss rate Γ_L is increased by a factor of 4. The increase of Γ_L we ascribe to the ground state dipole force fluctuations related to the optical Zeeman splittings [second term on right hand side of Eq. (4.1)] induced by the ellipticity of the light [41]. The optical Zeeman splittings can also be expected to interfere with the functioning of the MOT and thus reduce the loading rate. In the center of the FORT the splitting corresponds to that of a magnetic field of 13 Gauss, which is sufficient to disrupt both the cooling and trapping of the MOT.

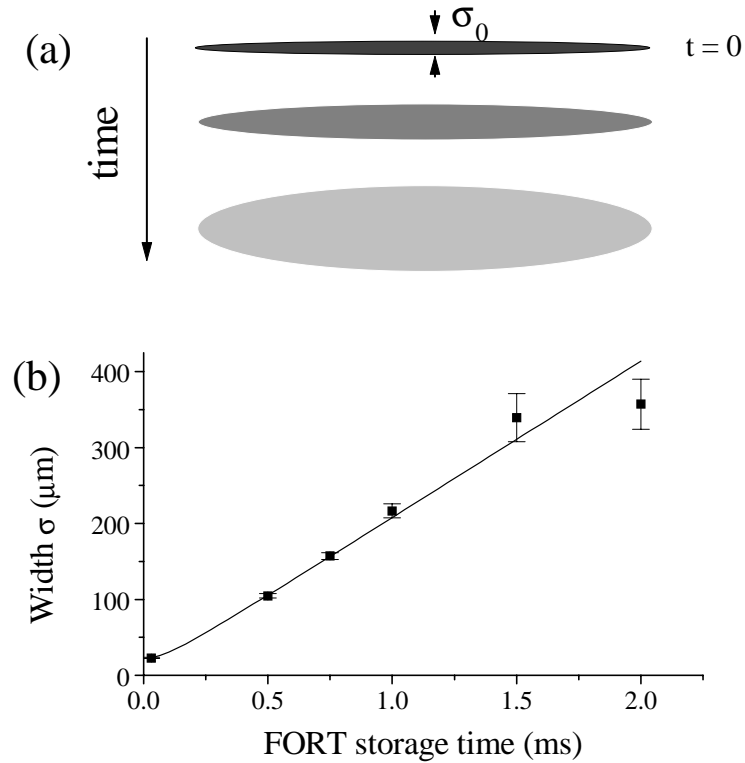


Figure 5.14: (a) Illustration of ballistic expansion and (b) an example of a temperature measurement.

5.5 Temperature

We measured the temperature of the atoms in the FORT for different trap depths. The temperature T of the atoms in the FORT was determined from the rate at which the cloud of trapped atoms expands after release. The density distribution is well described by a Gaussian of width σ that increases with expansion time t , as illustrated in Fig. 5.14 (a). The resulting σ vs. expansion time is plotted as in Fig. 5.14 (b). By fitting this data to the equation $\sigma = \sqrt{\sigma_0^2 + \frac{k_B T}{m} t^2}$, a temperature is readily extracted.

The temperature extracted from the transverse dimension was found to depend on potential well depth, as shown in Fig. 5.15. Although the transverse and longitudinal temperatures agree to within the experimental uncertainties, the transverse dimension

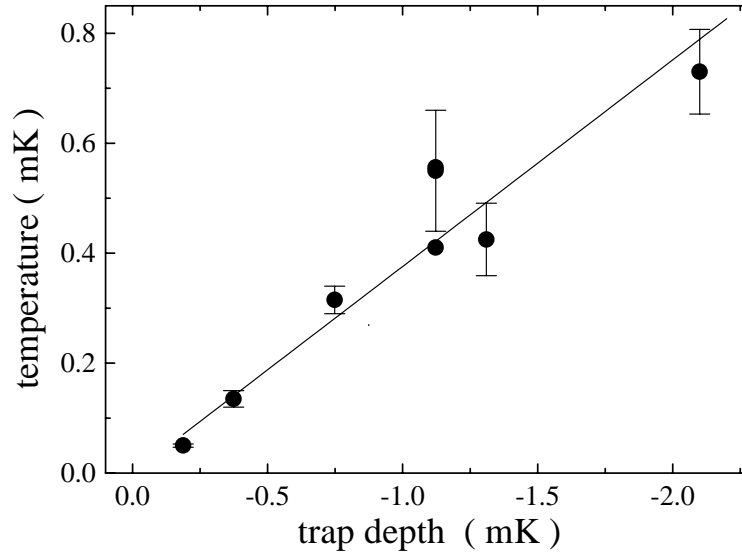


Figure 5.15: Temperature of the atoms in the FORT as a function of trap depth, for $w_0 = 26 \mu\text{m}$. Solid line is a linear regression giving a slope $T/U_0 = -0.4$.

is a much more sensitive probe of the temperature due to its smaller initial size. The initial aspect ratio of the cloud is 33 to $3000 \mu\text{m}$. Note that for the deeper traps the temperature is much higher than that of the atoms in the MOT, which is about $30 \mu\text{K}$ to $120 \mu\text{K}$, depending on the MOT detuning. Over the range of trap depths that we investigated the temperature is a fixed fraction 0.4 of the FORT depth.

5.6 Trap Lifetime

The number of atoms in the trap decreases after the trap is loaded, as is shown in Fig.5.3. In the absence of any MOT light the loss of the trapped sample has a number dependent (collisional) portion and a purely exponential part, as described by Eq. (4.3).

Typically, the exponential lifetime $1/\Gamma$ is between 1 s and 10 s, depending on the trap parameters. The lifetime increases with decreasing FORT scattering rate, until a limit (≈ 10 s) is reached that we believe is set by the background vapor pressure.

The collisional loss, characterized by β' , depends on the wavelength and waist size of the FORT beam. We observe clear resonances in β' , consistent with photoassociation lines. Between these lines we see a nonzero background level that presumably is due to ground state hyperfine changing collisions. This background level depends on the FORT light polarization. In a circularly polarized FORT [41], the atoms are spin polarized in one of the stretched states of the $F = 3$ ground state, from which hyperfine changing collisions are suppressed. In our trap we see a factor of 2 reduction of β' in between the photo-association lines when the polarization is changed from linear to

circular.

5.7 Analysis

5.7.1 Analysis of density dependent losses

The main features that we have observed in our data are the strong increase ($\times 100$) of the collisional loss coefficient β'_L when the MOT light is present and that this loss rate depends strongly on the MOT parameters. As we will show in this section, density dependent losses during the loading of the FORT are mainly due to radiative escape collisions induced by the MOT light. In the unperturbed FORT, ground-state hyperfine changing collisions are the dominant loss process.

5.7.1.1 Conversion to density dependent loss

The typical mechanism driving the collisional loss process in the FORT is more easily identified when the measured rate coefficients β' and β'_L are converted to density related, volume independent rate coefficients β and β_L . The relation between these is $\beta = \beta'V$, with V the volume of the sample of atoms. The volume is found by approximating the trapped sample of atoms as a cylinder with radius and length determined by the size of the FORT beam focus and the temperature of the atoms. The volume is then given by,

$$V = \pi w_0^2 z_R \ln\left(\frac{1}{1-\eta}\right) \sqrt{\frac{\eta}{1-\eta}}, \quad (5.5)$$

where $\eta = k_B T / U_0$ is shown in Sec. 5.5 to be a constant 0.4, regardless of the FORT parameters. Thus the volume only changes when w_0 changes.

5.7.1.2 Density dependent loss from the FORT without the MOT present

Density dependent losses from the FORT when there is no MOT light present are due to both photo-association and ground state hyperfine changing collisions, as mentioned in Sec. 5.6. Between photo-association lines, the values of β' do not depend strongly on the FORT laser power or wavelength, but change strongly with w_0 . However, when β' is multiplied by $V \propto w_0^4$, the resulting $\beta = (4 \pm 2) \times 10^{-12} \text{ cm}^3 \text{ s}^{-1}$, independent of w_0 . This value agrees well with the value of $4 \times 10^{-12} \text{ cm}^3 \text{ s}^{-1}$ reported by Miller *et al.* in Ref. [80].

5.7.1.3 Density dependent loss from the FORT during loading

In the case of loading the FORT, the density dependent losses are due to light-assisted collisions. To demonstrate this, we compare with measured rates in MOTs, where light-assisted collisions have been extensively studied. This comparison is complicated by the difference in trap depth between the MOT and the FORT (1 K vs. 1 mK), and also the difference in fractional occupation of the upper hyperfine component

of the ground state. In the case of a MOT the fractional population of the lower hyperfine component is negligible, and the loss term is written as βn^2 , where n is the total density of atoms in the MOT. Then for constant temperature, β depends linearly on the intensity of the assisting light.

These light-assisted collisions, as described by Gallagher and Pritchard [81], are due to two mechanisms: fine-structure changing collisions and radiative escape. It has been shown that these two mechanisms contribute with the same order of magnitude to the trap loss [82, 83] in 1 K deep MOTs. Radiative escape is predicted to scale almost inversely with trap depth ($\beta \sim U_0^{-5/6}$) [83, 84] for trap depths ~ 1 K, but the fractional contribution of fine structure changing collisions should decrease with decreasing trap depth. Therefore, we can neglect the contribution from fine structure changing collisions to β in describing the losses that occur during loading of the 1 mK deep FORT.

The fractional ground state population affects the loss rate in the following way. For radiative escape to occur, at least one of the two colliding atoms must be in the upper hyperfine ground state ($F = 3$). The MOT light is too far detuned to excite an atom from the lower ground state ($F = 2$) to a higher lying molecular state during a collision. Therefore, the loss term takes the form of $\beta n_3(n_2 + n_3)$, where n_3 is the density of atoms in the $F = 3$ state, n_2 is the density of atoms in the $F = 2$ state, and $n_2 + n_3 = n$.

The fraction of atoms in the $F = 3$ state depends on the relative optical pumping rates of the primary MOT laser ($F = 3 \rightarrow F' = 3 \rightarrow F = 2$) as compared with the repump laser ($F = 2 \rightarrow F' = 3 \rightarrow F = 3$). We derive the fraction of atoms in the $F = 3$ state from a simple two level rate equation model, which results in $n_3/n = I_R/(I_R + aI_M)$, where a is a constant that reflects the relative optical pumping rates. These rates depend on the AC stark shifts induced by the FORT, in addition to Clebsch-Gordon coefficients and the frequency of each laser. The average shift in the transition frequency for atoms in the FORT (Δ_{AC}) was extracted from Fig. 5.7 and found to be $\Delta_{AC} = 2.3 \gamma$. This results in $a = 0.02$. The experimentally determined loss rate coefficient is then,

$$\beta'_L = \frac{K I_M}{V} \frac{I_R}{I_R + aI_M}, \quad (5.6)$$

where K is a constant related to the density-dependent loss rates independent of optical pumping effects. We again use the volume V given by Eq. (5.5) to make the translation from the typical density-dependent loss rate to the loss coefficient that we measure in our experiments. For $w_0 = 26 \mu\text{m}$ we find $V = 1.3 \times 10^{-6} \text{cm}^3$.

The behavior described by Eq. (5.6) is clearly seen in the measured dependence of β'_L on both I_M and I_R as shown in Figs. 5.6(b) and 5.8 (b). The solid curves in these plots are fits of Eq. (5.6) to the data, with K the only free parameter. The fits to the different data sets give $K = (1.4 \pm 0.7) \times 10^{-16} \text{cm}^5 \text{mW}^{-1} \text{s}^{-1}$, where the spread is due to the different values we find by fitting different data sets. We see that Eq. (5.6) gives a good description of the measured MOT and repump intensity dependencies of the loss rate during loading of the FORT.

For a comparison of our numbers with those normally found in MOTs we set

$n_3/n = 1$, assuming all atoms are in the $F = 3$ ground state as they are in the MOT studies with which we want to compare. Thus $\beta_L = K I_M$. For $I_M = 10\text{mW}/\text{cm}^2$ we find $\beta_L = 1 \times 10^{-9} \text{ cm}^3/\text{s}$. In contrast, a MOT with comparable powers and detunings has a loss rate of $1 - 4 \times 10^{-12} \text{ cm}^3/\text{s}$ [85, 86, 87, 84], which is a factor of 250 to 1000 smaller than our measured value. As shown below, this difference is due to the smaller depth of the FORT.

In order to explain the increased loss rate observed during loading of the FORT as compared to a MOT we will discuss in more detail how the FORT depth affects the radiative escape loss rate. In the case of a MOT, the dependence of β , due to radiative escape, on the trap depth is predicted to go as $U_0^{-5/6}$ in the limit of large trap depths [83, 84]. However, some of the assumptions used to derive this dependence break down at smaller trap depths. Therefore, to calculate β_L for the FORT we perform a numerical calculation of the radiative escape process, using the semi-classical Gallagher-Pritchard (G-P) model [81]. Given the uncertainties in our measured β_L , a more detailed calculation is unwarranted. Therefore, we do not include angular momentum considerations or enhanced survival probability as described by Julienne and Vigue [83] or any corrections for the hyperfine splittings as introduced by P. Lett et al. [82]. Instead, we approximate all of the involved intramolecular potentials as a single $-C_3/r^3$ in the GP model as formulated by Peters et al. [88] and integrate numerically.

Figure 5.16 shows an approximate intramolecular potential for Rb. For initial excitation at radius r_0 , atoms are accelerated toward one another for some time before spontaneous emission leaves two ground-state atoms with more kinetic energy than they had initially. If the kinetic energy picked up in the collision exceeds the depth of the trap, both atoms will be lost. The radius at which the pair acquires exactly enough energy to be ejected from the trap is therefore called the critical radius r_c , and the time required for the atoms to reach this is called t_0 .

Once the atoms reach r_c , acceleration is very fast, and the atom pair spends a short time t_1 accelerating to $r = 0$. If spontaneous emission does not occur during this second time interval, the intramolecular separation will oscillate between 0 and r_0 , making multiple orbits until spontaneous emission occurs. The probability of a lossy radiative escape event thus depends on the excitation probability at r_0 and the probability of decay occurring when $r < r_c$. Following Refs.[88] and [89] we find

$$\beta \propto \int 4\pi r_0^2 dr_0 G(r_0) P_{RE}(r_0), \quad (5.7)$$

where the photon scattering rate of atoms in the $F = 3$ state, $G(r_0)$, is a function of the effective detuning $\Delta(r_0) = -C_3/(r_0^3 \hbar) + \Delta_M$ with respect to the unperturbed atomic transition frequency. The probability of a radiative escape event resulting in trap loss is $P_{RE} = \sinh(\gamma t_1) / \sinh[\gamma(t_0 + t_1)]$, which reflects the important contribution of multiple orbits [88].

The result of the numerical integration of Eq. (5.7) for different trap depths is show in Fig. 5.17. The dashed line indicates a dependence of $\beta \sim U_0^{-5/6}$ as predicted by Refs. [83] and [84]. This clearly tracks our numerical integration at large trap depths, where it is expected to be valid. Examination of the change in β with U_0 shows that

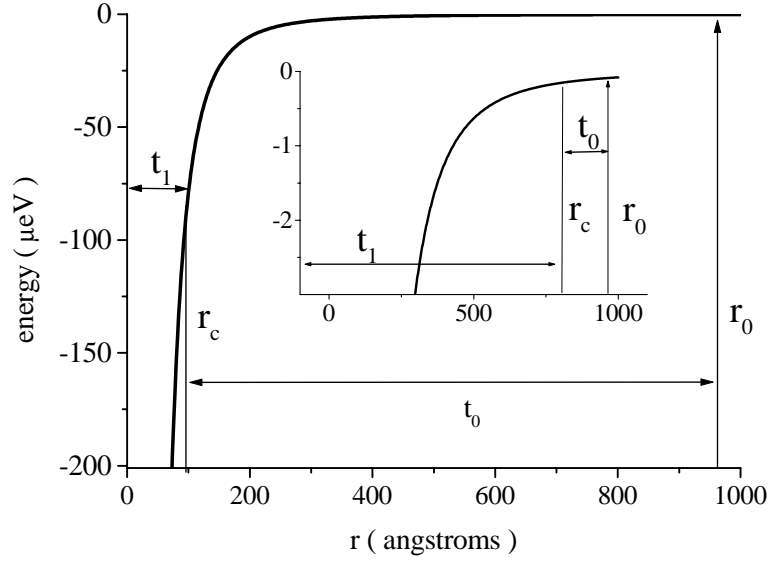


Figure 5.16: Approximate intramolecular potential for Rb, with $C_3 = 71 \text{ \AA}^3 \text{ eV}$. The large graph shows the critical radius, r_c , for $U_0/k_B = 1 \text{ K}$, while the inset depicts the same parameters for $U_0/k_B = 1 \text{ mK}$.

for a change in U_0 from 1 K to 1 mK, β increases by a factor of ~ 50 (for $n/n_3 = 1$). This ratio is at least a factor of 5 smaller than the experimentally observed ratio of 250. However, given the large uncertainties in the experimental determination of n and n_3/n , as well as the approximations that go into the calculations and the steep dependence of the results, the measured and calculated numbers are not inconsistent. Therefore we believe that the enhanced loss rates we observe during loading are consistent with light-assisted collisions.

5.7.2 A model for the FORT loading rate

The initial loading rate is the flux of atoms into the volume of the FORT times the probability for an atom in this volume to become trapped;

$$R_0 = \frac{1}{4} n_{\text{MOT}} \bar{v} A P_{\text{trap}}, \quad (5.8)$$

where n_{MOT} is the density in the center of the MOT, $\bar{v} = k_B T/m$ is one dimensional component of the root mean square thermal velocity of the atoms in the MOT, A is the effective surface area of the FORT, and P_{trap} is the trapping probability. For the discussion below we will assume that the MOT density is constant in time, i.e. n_{MOT} is the density at the start of the loading stage.

The dependence of R_0 on MOT detuning is plotted in Fig. 5.9. The loading rate shows a maximum at $\Delta_M = -30 \text{ MHz}$, the same detuning at which the measured

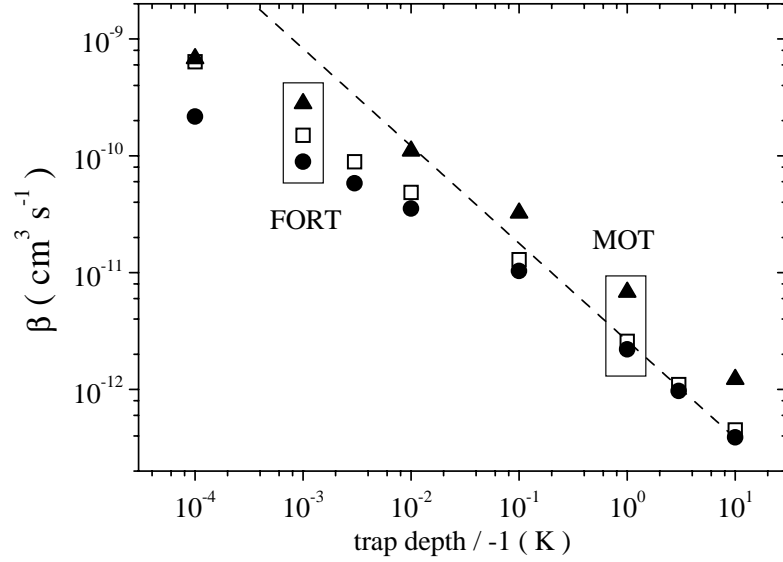


Figure 5.17: Radiative escape loss rate coefficient β calculated as a function of the absolute value of the trap depth. When the atoms have zero initial kinetic energy, (\blacktriangle) correspond to β values for $\Delta_{AC} + \Delta_M = 2\gamma$ and (\bullet) to 8γ . (\square) depict 8γ , but with an initial relative velocity $v = k_B T/m$, corresponding to $T = 800 \mu\text{K}$. The dashed line represents $\beta \propto U_0^{-5/6}$ as mentioned in the text.

product $n_{\text{MOT}}\sqrt{T}$ plotted in Fig. 5.18 has a maximum. This supports the idea that $R_0 \propto n_{\text{MOT}}\bar{v}$, assuming that AP_{trap} is constant with MOT detuning.

The loss rate β_L^t has a minimum at a slightly larger detuning. The maximum number of atoms will be loaded into the FORT at a detuning close to the maximum in the loading rate and simultaneous minimum in the loss rate. This is illustrated by substituting the measured R_0 and β_L into Eq. (5.4). Thus calculated the number of atoms transferred into the FORT clearly shows a maximum at a detuning of 35 MHz (see Fig. 5.18). In the same figure we plotted the actual measured number of atoms. The agreement is very good over the detuning range of interest, 0-30 MHz. The difference between the calculated and measured numbers at large detunings is caused by the rapid loss of atoms from the MOT, which prevents N from reaching the value predicted by Eq. (5.4).

The loading rate R_0 depends on A , in addition to $n_{\text{MOT}}\sqrt{T}$. For a trap with a waist of $26\mu\text{m}$ the Rayleigh range is 1.5 mm. This is a few times larger than the diameter of the cloud of atoms trapped in the MOT, D_{MOT} . This means that the FORT radius hardly changes over the width of the MOT. Therefore we approximate A by the surface area of a cylinder with length given by the MOT diameter D_{MOT} and an effective radius r_{eff} , that is a function of z and depends on the FORT waist. The radius

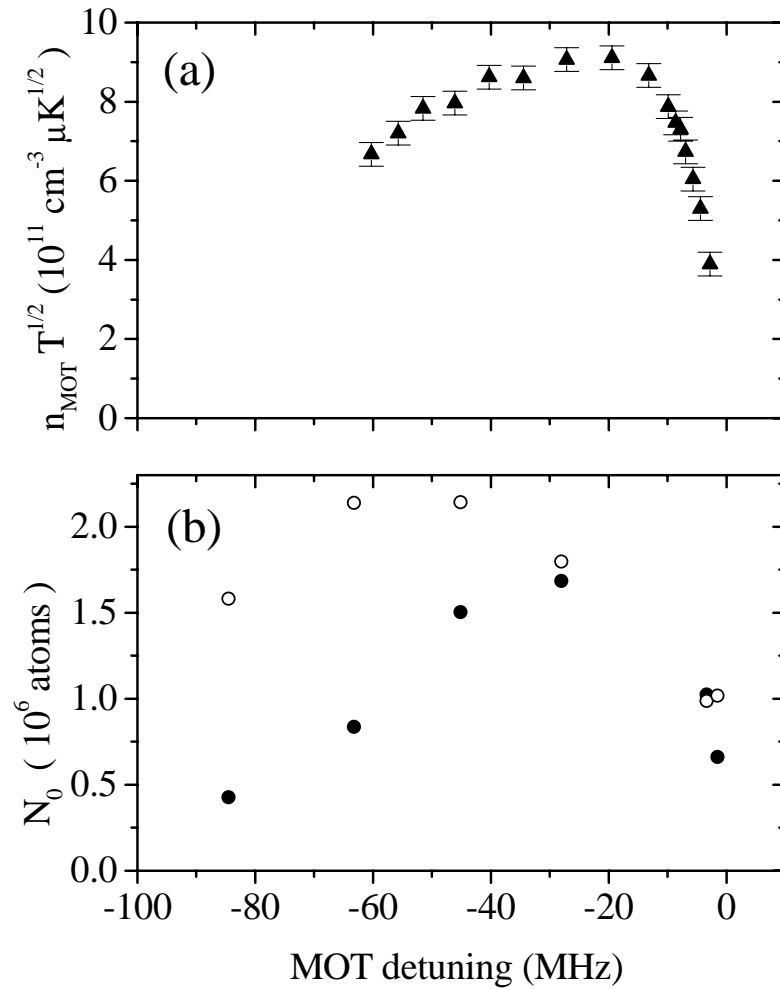


Figure 5.18: Product of MOT density and the square root of temperature (a) and number loaded into FORT (b) as a function of the MOT detuning during FORT loading. The actually measured number (\bullet) and the number calculated from Eq. (5.4) (\circ) are both shown in (b). The FORT parameters are those of Fig. 5.9.

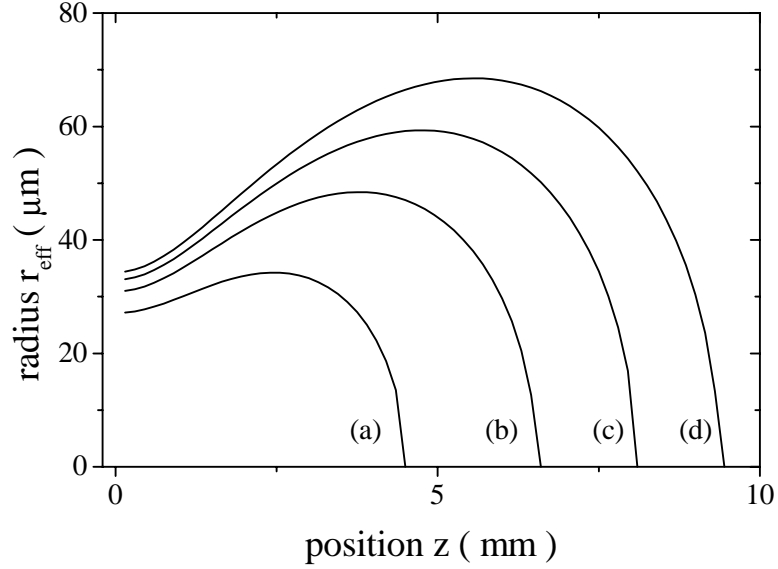


Figure 5.19: Equipotential contours of the FORT for $E/k_B = -100 \mu\text{K}$ and $U_0/k_B = -1, -2, -3,$ and -4 mK depth, (a)-(d) and $w_0 = 26 \mu\text{m}$.

is set by the coordinates at which the FORT potential becomes the same size as the temperature of the atoms in the MOT, $U(r_{\text{eff}}, z) = U_c \approx -k_B T$. The effective radius $r_{\text{eff}}(z)$ of the FORT, depending on z and U_c is then

$$r_{\text{eff}}(z) = w_0 \left[\left(1 + (z/z_R)^2\right) \ln\left(\frac{U_0}{U_c} \frac{1}{2(1 + (z/z_R)^2)}\right) \right]^{\frac{1}{2}}. \quad (5.9)$$

In Fig. 5.19 this equipotential contour is plotted for different values of U_0 and $U(r_{\text{eff}}, z) = -100 \mu\text{K}$. The bow tie shape of these contours explains why the best loading is achieved when the FORT and MOT are displaced. The radius has a maximum away from the focus. Moreover, for deeper traps the z at which the maximum radius occurs shifts to bigger z values, just as in the data.

A typical initial MOT density during the FORT loading stage is $2 \times 10^{11} \text{ cm}^{-3}$, and the temperature ranges from $30 \mu\text{K}$ to $100 \mu\text{K}$ depending on detuning of the primary MOT light. A reasonable value for the average speed in one dimension is thus $\bar{v} = 5 \text{ cm/s}$. The MOT diameter is $500 \mu\text{m}$ (FWHM). For $U_0 = -1 \text{ mK}$ and $U_c = -100 \mu\text{K}$ the area $A = 1 \times 10^{-3} \text{ cm}^2$. Using these numbers the loading rate is $2.5 \times 10^8 \text{ s}^{-1}$ if the trapping probability $P_{\text{trap}} = 1$. The loading rate measured for such a trap is $3 \times 10^7 \text{ s}^{-1}$, implying $P_{\text{trap}} \approx 0.1$.

The data in Fig. 5.8 show that the loading rate increases nearly linearly with MOT intensity. However, it is known that the MOT temperature and density in the Sub-Doppler regime scale as intensity and the inverse square root of intensity, respectively [74, 90].

The product $n_{\text{MOT}}\bar{v}$ is thus expected to show no strong dependence on MOT intensity. We have experimentally confirmed this by measuring the density and temperature of the cloud of MOT atoms as a function of MOT intensity. Over the range of MOT intensities as in Fig. 5.8 we find that $n_{\text{MOT}}\bar{v}D_{\text{MOT}}$ is nearly constant. Therefore, we conclude that the observed increase of the loading rate with increasing MOT intensity arises from an intensity dependence of the trapping probability P_{trap} . From the data we find $P_{\text{trap}} \approx 0.1$

We estimate P_{trap} by using the following simple model. The atoms come into the trapping volume with a narrow distribution of velocities around an average velocity \bar{v} . To be trapped, an atom's energy has to be reduced to below the edge of the trapping potential. The time scale for this to happen must be about half an oscillation period $\tau/2$ of the FORT in the strong direction, which is $150 \mu\text{s}$ for the above mentioned trap. The scattering of MOT laser photons affects the atomic velocity in two ways. First, the atom scatters photons that leads to heating, that is, a broadening of its velocity distribution. The spread in velocity due to photon scattering is $\sigma = \sqrt{\frac{1}{3}(\frac{\hbar k}{m})^2 \Gamma_{\text{scat}} \tau/2}$. Second, the frictional component of the scattering leads to a reduction of the atom's average kinetic energy. The rate at which the atom loses energy is $\dot{E} = -\alpha\bar{v}^2$. This damping leads to a change in average velocity of $\Delta v = \bar{v}\sqrt{\frac{\alpha\tau}{m}}$ in the characteristic time $\tau/2$.

The probability of being captured is the integral of the shifted and broadened distribution

$$P_{\text{trap}} = \int_{\bar{v}-\Delta v}^{\infty} \frac{1}{\sqrt{2\pi}\sigma} \exp\left[-\frac{v^2}{2\sigma^2}\right] dv. \quad (5.10)$$

The integral leads to

$$P_{\text{trap}} = \frac{1}{2} \left[1 + \text{erf}\left[\frac{\bar{v}}{\sqrt{2}\sigma} \left(1 - \sqrt{\frac{\alpha\tau}{m}}\right)\right] \right]. \quad (5.11)$$

For $\Delta_M = 30 \text{ MHz}$ and $I_M = 6 \text{ mW/cm}^2$ the MOT scattering rate $\Gamma_{\text{scat}} = 9.5 \times 10^5 \text{ s}^{-1}$, which makes $\sigma = 6 \text{ cm/s}$.

We obtain a value of α from the formula given in Ref.[84]. The damping rate calculated from this formula increases linearly with MOT intensity for the velocities we are interested in. The values of α and σ also depend on MOT detuning. There is a strong spatial dependence of the effective MOT detuning due to the light-shift induced by the FORT. We make the crude approximation that the MOT is shifted out of resonance by half the FORT light-shift. This results in $\bar{v}/\sigma = 2$ and $\alpha/m = 200 \text{ s}^{-1}$. The result of this model is plotted as a solid curve in Fig.5.8 and shows good agreement. This is a very approximate treatment but it clearly supports our general interpretation of the loading process.

5.8 Discussion

From our understanding of the loss process and the loading rate we are now in a position to explain the dependencies presented in Sec. 5.4. We saw that more atoms

are loaded into deeper FORTs, because the loading rate increases and the loss rate decreases. The loading rate increases because the effective FORT radius increases with trap depth, which enhances the flux of atoms into the trap. The loss rate decreases because the probability of light-assisted collisional loss decreases when the trap is deeper. In addition, the light-shift of the trap increases the effective detuning of the MOT light and repump light for the atoms in the trap, which reduces their excitation rate, and therefore reduces radiative escape.

The data in Fig. 5.10 shows that the MOT detuning at which loading is optimized is smaller for deeper FORTs. A deeper trap means larger light shifts of the atoms. The MOT detuning and the repump detuning are both shifted blue, so that the detuning of both lasers from the atoms becomes more negative (red) in both cases. Due to the increased effective detunings the MOT cooling rate decreases and thus the trapping probability decreases. By choosing a smaller MOT detuning the loading rate is increased.

The dependence on MOT detuning of the β'_L that we measured for a given trap depth (see Fig. 5.9) is also well described by Eq. (5.6). The detuning dependence enters through the parameter a . At small MOT detunings, the MOT excitation rate is highest and therefore β'_L is large. By increasing the MOT detuning further a becomes smaller. Therefore aI_M becomes negligible compared to I_R and β'_L becomes independent of detuning.

In Sec. 5.4.1 it was shown that loading is optimized for repump light of very low intensity that is tuned on resonance. We saw that the number of atoms in the FORT dropped when the repump intensity was increased but the repump scattering rate was maintained by changing the repump detuning. Increasing the repump intensity increases the loss rate. Although the detuning is increased for the atoms in the MOT such that the scattering rate is the same for the MOT atoms, the increased intensity still causes an increased scattering rate for the atoms trapped in the FORT.

5.9 Enhanced and quasi continuous loading

The previous data and analysis shows that β'_L is very small when the repump power is zero, and reducing the primary MOT intensity also helps to reduce the loss rate. However, reducing these light intensities also reduces the loading rate. It is possible to improve the ratio of loss to loading rate by changing the beam geometry. The loss rate only has to be eliminated in the volume where the FORT is, which can be done by inserting obstructions to block portions of the MOT beams and the repump beam.

To demonstrate this concept, we make a shadow in the repump beam. For this purpose an additional repump beam is used that co-propagates with the FORT beam. A 0.6 mm opaque disk in this beam is imaged into the MOT and FORT region, such that the shadow covers the length of the FORT. The peak intensity in this repump beam is increased from $5 \mu\text{W}/\text{cm}^2$ to $460 \mu\text{W}/\text{cm}^2$, which is sufficient to prevent the MOT from being lost while loading the FORT. The MOT is still loaded as before using a repump beam without a shadow. During the loading of the FORT, that repump beam is switched off, and the shadowed beam switched on. In Fig. 5.20 we show two measured

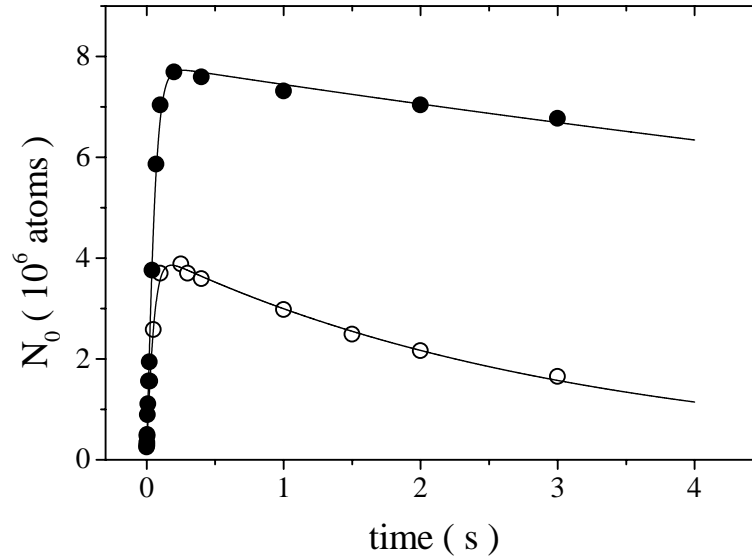


Figure 5.20: Number of atoms loaded into the FORT as a function of loading time, using normal loading (\circ) and enhanced loading with a shadowed repump beam (\bullet). The FORT parameters are $w_0 = 58 \mu\text{m}$, $P = 580\text{mW}$ and $\lambda = 783.2\text{nm}$. The solid curves are fits of Eq. (5.3) to the data.

loading curves. One shows loading using the conventional method without the shadow and with reduced repump power, and the second curve shows the new method with the shadowed beam and increased repump power. The maximum number of loaded atoms doubles from 3.9×10^6 to 7.7×10^6 . The transfer efficiency from MOT to FORT increased from 21% to 42 %.

The increase in the number is caused by a decrease of the loss rate from $\beta_L^l = (3.5 \pm 0.5) \times 10^{-6}\text{s}^{-1}$ to $\beta_L^l = (1.7 \pm 0.3) \times 10^{-6}\text{s}^{-1}$ and a simultaneous increase of the loading rate, from $R_0 = 5.8 \times 10^7\text{s}^{-1}$ to $R_0 = 10.2 \times 10^7\text{s}^{-1}$, respectively. The loading rate is increased due to the fact that the MOT density increases by reducing the repump intensity in the center of the MOT.

The loss rate β_L^l is still larger during loading with the shadow than in the absence of all MOT light, where the loss rate $\beta^l = 2.3 \times 10^{-7}\text{s}^{-1}$. This is due to the fact that the MOT light is not shadowed and the FORT acts as a very weak repump laser. Thus putting additional shadows in the main MOT light may improve the loading even more, but this requires a more complicated optical setup. By reducing β_L^l to the limit of no MOT light, while maintaining the same loading rate, the steady state number of atoms would be 2×10^7 , which would be nearly all of the MOT atoms.

5.10 Conclusions

Our study can be summarized as follows. Deeper traps load more atoms and the temperature is a fixed fraction of the trap depth. Optimum loading is achieved for very low repump scattering rate ($I_{\text{RP}} = 5 \mu\text{W}/\text{cm}^2$), and a MOT detuning that depends on the FORT depth. Controlling the geometry of the overlap of the MOT and FORT beams gives substantial improvement. To maximize the number of atoms trapped in the FORT, these are the parameters to adjust.

However, underneath this recipe lies a lot of interesting physics. Loading the FORT from a MOT is a dynamical process, governed by a loading rate R_0 and density dependent losses characterized by β'_L . During the loading the MOT light fields increase the FORT loss rate considerably. The main loss mechanism during loading of the FORT is radiative escape collisions induced by the MOT light fields. The loss rate is higher than in a MOT because the FORT is only on the order of a mK deep, whereas a typical MOT is a K deep. In addition, the light-shift due to the FORT changes the balance of optical excitation of the MOT trapping and cooling light, which is responsible for the radiative escape, and the hyperfine repump rate. Taking these effects into account we were able to model how the loss rate depends on the intensities and detunings of the primary MOT and repump lasers, as well as the FORT depth. This model explains the experimentally observed dependencies of the loss rate on these parameters very well. The loading rate can be described in two parts: a flux of atoms into the volume of the FORT times a probability of being trapped. Both parts depend on the MOT and FORT parameters, including the size of the FORT.

Here we studied the loading of a FORT with a radius $\leq 60 \mu\text{m}$, which is much smaller than the radius of the MOT. Even with this mismatch of size between the MOT and the FORT we were able to transfer more than 40% of the atoms initially trapped in the MOT to the FORT. For FORTs with a radius comparable to that of the MOT the description of the loading rate changes, and also the loss rate may behave differently. However, we believe that radiative escape processes may still be enhanced as compared to a MOT. Working with a small waist enables one to make deeper traps and achieve tighter confinement. Such conditions may make it possible for instance to reach Bose Einstein condensation at high temperatures of tens of micro-Kelvin.